

910 S 199<sup>th</sup> Ln Buckeye, AZ 85326 386-299-6929 LightningMotorsportsAZ.com lightningmotorsportsaz@gmail.com

Customer: Stan

Machine: 2001 Yam XV1600 RS Silverado

Quantity	Description	Unit Price	Amount
1	Yamaha 3D8-85753-00-00 Sender Unit Gasket		
1	All Balls Racing 60-1000 Fuel Petcock Rebuild Kit		
	NGK DPR8EA-9 Spark Plug		
1	Shop Supplies (cleaner, towels, RTV, lube, brake fluid)		
1	Safety Inspection and Test Ride		
		Sub Total	
		Tax	
	Labor/hr		
		Total Due	

### **Labor Estimates:**


- 1. Replace fuel sender unit gasket (need) -
- 2. Replace petcock gaskets (strongly recommend) -
- 3. Engine Oil and Filter Change -
- 4. Spark plug (4) replacement -
- 5. Drain, Fill, and Bleed Front Brakes -

### Thank you for your business.



- 6. Drain, Fill, and Bleed Rear Brakes -
- 7. Air tires to PSI
- 8. Remove, clean, and oil air filter
- 9. Charge battery
- 10.Safety check: lights, leaks, fluids, brakes, tires
- 11.Replace choke cable



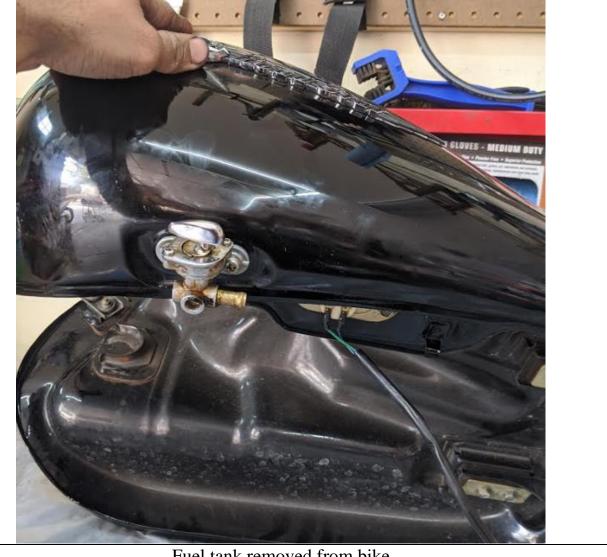


Fuel tank removed from bike

Thank you for your business.



Fuel sender unit gasket requires replacement

petcock should be rebuild with fresh gaskets

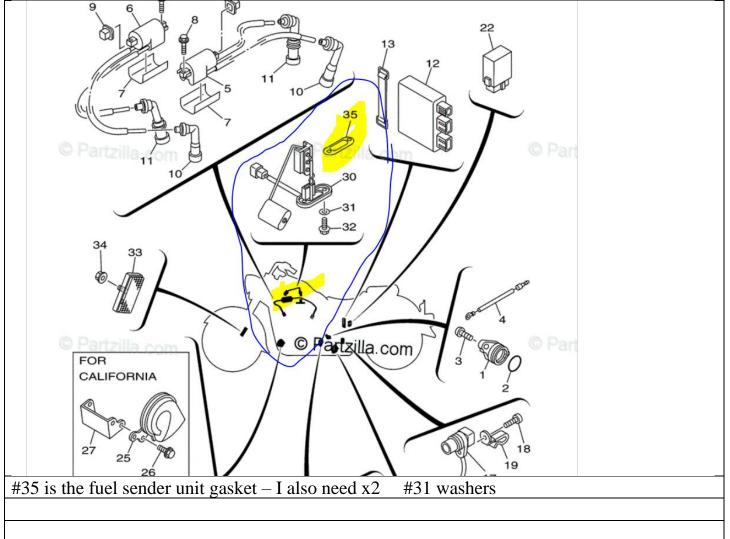


Thank you for your business.

## Labor Notes:

- 1. Oil level and condition appears OK. Amount of time that oil has been in bike unknown
- 2. Rear brake reservoir was nearly empty. Filled and bled line with synthetic DOT 4
- 3. Petcock Rebuilt and cleaned
- 4. Sender unit gasket replaced fuel level float unit inspected APPEARS OK
- 5. All 4 spark plugs replaced show signs of the bike running rich
  - a. Recommend air filter inspection/clean or replace
- 6. Choke cable thread is broken requires replacement to function properly
- 7. Battery tested at 12.5 volts after sitting for one week. Battery charged overnight and displays 12.76 volts on surface after charge

# Labor Actuals:

- 1. Remove fuel tank and replace fuel sender unit gasket.
- Remove, disassemble, and rebuild petcock
- 3. Remove and Replace all 4 Spark Plugs
- 4. Bleed rear brakes (no brake fluid in reservoir)
- 5. Check engine oil level checks OK
- 6. Air tires to PSI 36/40 (they were both 5PSI low)
- 7. Remove and Charge battery
- 8. Safety Check (lights, leaks. Fluids, brakes, tires)





Petcock Before

Gaskets needed to be replaced

Thank you for your business.






Fuel Sender Unit Gasket

Petcock cleaned and rebuilt



Thank you for your business.

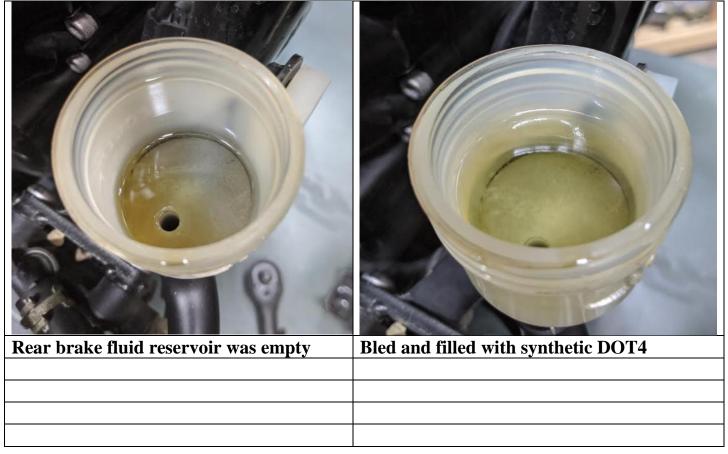

Thank you for your business.